

Premier U 70 DR CO2 (AKCC-B) Refrigerator/Freezer 'U' type with Danfoss controller w/bluetooth for remote cooling system



2/1 GN

ACCESSORIES INCLUDED

3 grey shelves (530 x 650mm) + 1 bottom shelf, Pedal door opener with overload protection

OPTIONAL EXTRAS

Set of legs 130-180 mm
Grey shelf with back guard
Grey bottom shelf with back guard
Stainless shelf with back guard
Stainless bottom shelf with back guard
Set of stainless shelves (3 top and 1 bottom) with back guard
Master key

PRODUCT SERIES: PREMIER 70
ITEM NUMBER: 188701015
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Premier U 70 DR CO2 (AKCC-B) is a 2/1 GN deep cabinet with Danfoss controller with bluetooth for connection to a remote cooling system. It is ready to install and is compatible with R744 (CO2) refrigerant. This heavy duty cabinet has a gross volume of 700 ltr. and the height of the cabinet with adjustable legs is 2080-2130mm. Adjustable legs are 130-180 mm. The depth is 848 mm without pedal door opener (920 mm incl. pedal door opener).

Ultimate flexibility with 'U' type cabinet:

The cabinet can be set to run as a refrigerator or as a freezer. Set the controller to run as either K, M or F cabinet with the following temperature ranges:

K: +2/+12°C M: -5/+12°C F: -25/-5°C

- Ready-to-install cabinet prepared for external cooling system and compatible with refrigerant R744 (CO2)
- Danfoss controller AKCC 550A with bluetooth
- Danfoss controller display AK-UI55
- Air distribution system
- Automatic fan cut-out when door is opened
- Automatic electric defrost with re-evaporation of defrost water
- Heavy duty cabinet built for climate Class 5 cooling system
- Exterior and interior of stainless steel AISI 304
- Anti-tilt shelf supports moulded into the inner lining
- LED lighting on the top panel
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pedal door opener with overload protection (included as accessory)
- Pan-shaped inside base with rounded corners to catch fluids
- Low sound level
- IP21 water protection
- Comes with powerlead
- Matching design identity as the Premier counters

WARRANTY PERIOD
1 Year on Parts

EXTERIOR
Stainless steel AISI 304

INTERIOR
Stainless steel AISI 304

Refrigerant compatibility: R744

CERTIFICATIONS





HOSHIZAKI

Premier U 70 DR CO2 (AKCC-B)

TECHNICAL SPECIFICATIONS


Shelf size	Volume, gross	Power supply	Min. cooling capacity K and M cabinets at -10°C	Min. cooling capacity F cabinets at -30°C	Maximum current amperage	Maximum system pressure	Connection load	Temperature Range Span	Climate class
2/1 GN deep	700 l	230V, 50Hz	300 W	376 W	2.5 A	90 Bar	580 W	-25/+12°C	5 (max. ambient 40°C w/ 40% RH)

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
750 mm	975 mm	2,150 mm	1.57 m ³	115 kg	690 mm	848 mm	1,950 mm	2,080 mm	2,130 mm	105 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: This cabinet for connection to remote cooling system is on special order only. Please take longer lead times into consideration

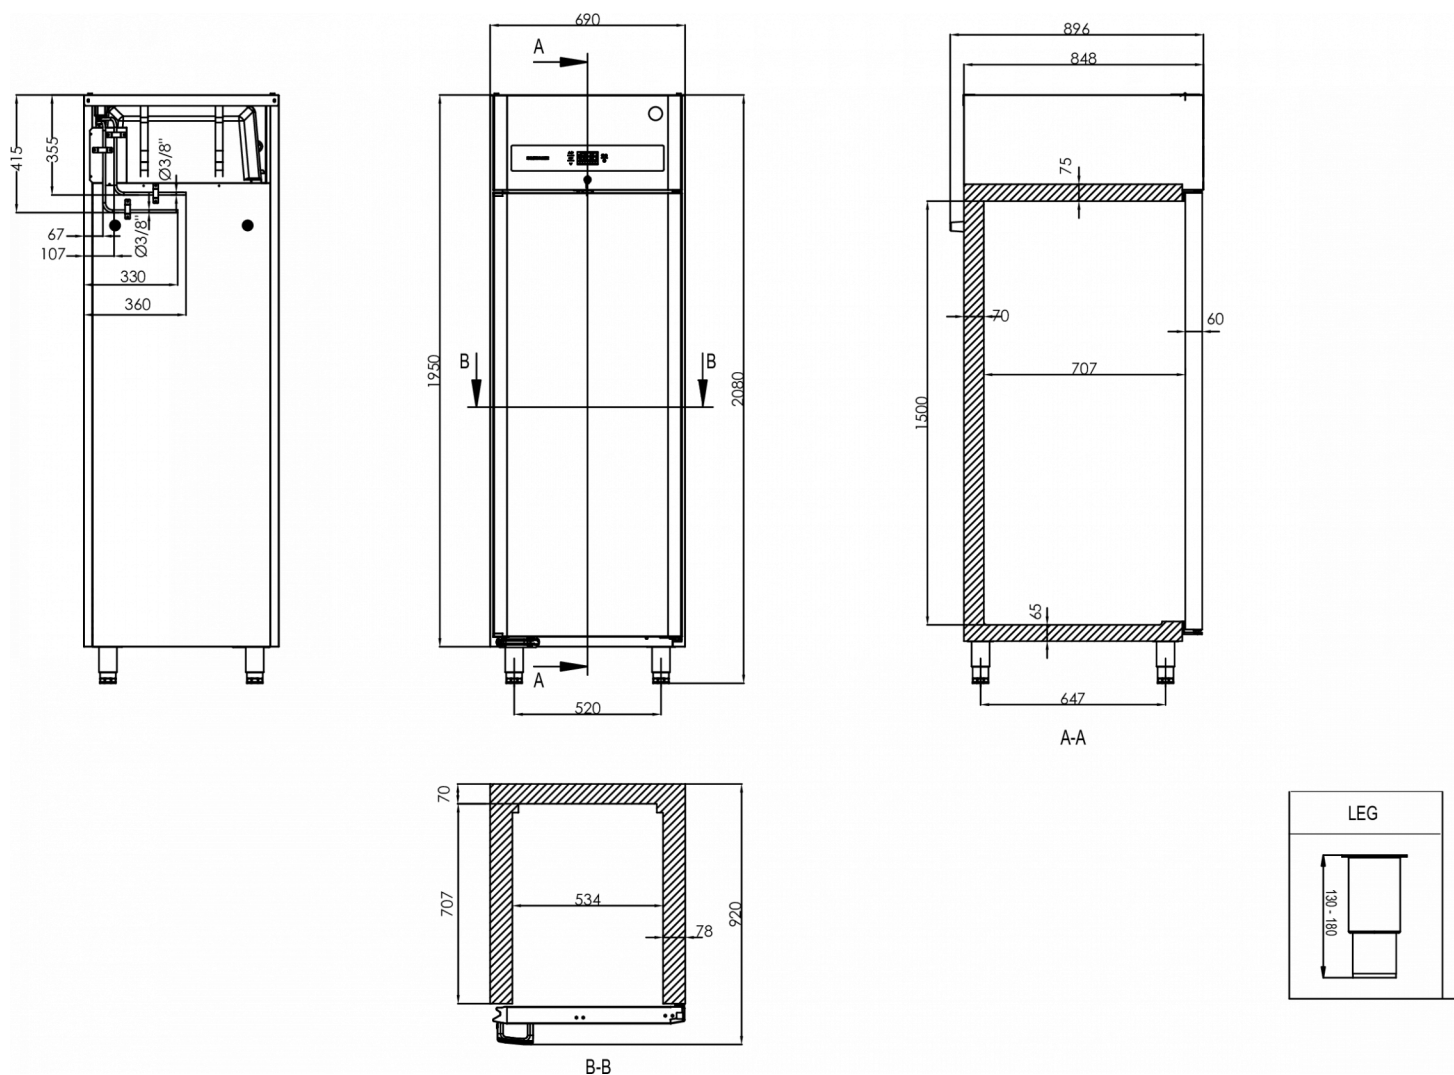

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com